


# Box Contents

NOTE: Revolabs Wireless Microphones Ship in Separate Box(es)

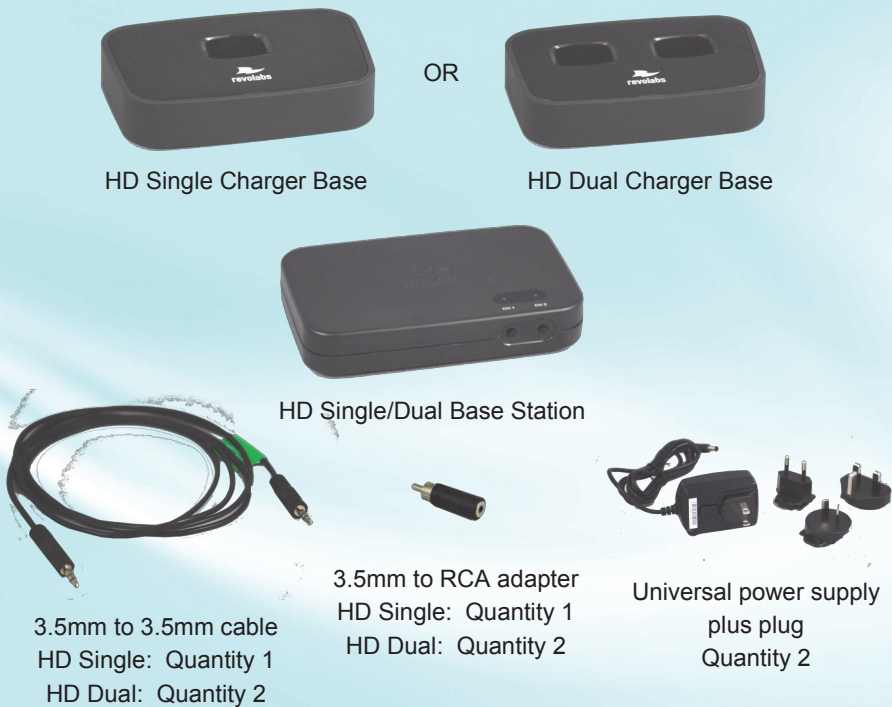

# How to Assemble

1. Plug a power clip into each power supply.
2. Plug a power supply into Charger Base and another into Base Station.
3. Plug all power cords into electrical outlets.
4. Plug the 3.5 mm end of the cable(s) into Base Station. If needed, plug 3.5 mm to RCA adapter into one end of the cable.
5. Plug cable(s) into AV equipment.
6. Pair Revolabs Wireless Microphone(s) to Base Station using the pairing instructions.
7. Place microphone(s) into Charger Base.

Technical Support 9:00 a.m. to 5:00 p.m. EST 1-800-326-1088  
support@revolabs.com www.revolabs.com



Hear Every Word!

# How to Configure Basic Settings

Refer to HD Single/Dual Channel User Guide on [www.revolabs.com](http://www.revolabs.com)



DIP Switch	Feature	Off (Default)		On	
1	Output Mixing	Individual Outputs		Mixed Output	
2	Low Pass Filter	No LPF		LPF	
3	Audio Output Level	Line Level		Mic Level	
4	Mute	Local Mute		No Local Mute	
		Flat	High Boost	Bass Boost	Dynamic
5	Microphone EQ	Off	On	Off	On
6	Microphone EQ	Off	Off	On	On
		150'	100'	50'	15'
7	Transmit Power	Off	On	Off	On
8	Transmit Power	Off	Off	On	On

Regulatory Information (full information in User Guide)

Technical Support 9:00 a.m. to 5:00 p.m. EST 1-800-326-1088  
support@revolabs.com www.revolabs.com



Hear Every Word!